



LPG Safety Tips for HOME

Nothing is more important to us than your safety, we are here to help you be prepared, ALWAYS.

Here are a few safety tips from **Aegis** experts to help you with
Safe, Reliable & Clean Cooking!



LPG Do's



Always keep the cylinder at ground level, on a flat surface in upright position with valve on top.



Place gas stove on a platform or table, above the cylinder.



Ensure that the time of delivery, check for company Seal & Safety intact. No leakage from valve.



Wear cotton Apron while cooking, When lighting burner, strike match before switching on burner.



Ensure all parts are in good condition, get it checked once a year.



Switch off regulator after every cooking/ during night hours.



Check hose pipe regularly for leaks, change the tube every 5 years.



Use ISI Regulators provided by Aegis company only.

LPG Dont's



Don't keep the cylinder exposed to sun, rain, dust and heat



Don't have curtains on the window near the gas stove.



Don't forget to turn off the valve when cylinder is not in use.



Never use lighted match sticks for checkin leaks.



Don't store kerosene or other flammable equipment's in the kitchen.



Don't use any damaged or worn hose.



Don't use any part of your clothing for placing or removing utensils on the stove.



Never leave cooking unattended.



LPG installation

Safety Tips

DISCONNECTING CYLINDER

- Put out all the flames and fires in the kitchen/ room
- Close all the taps on the burner.
- Turn the switch knob of the regulator from 'ON' position to 'OFF' position.
- Grip the regulator and pull the bush (black plastic locking ring) up and lift the
- regulator by giving a gentle swivel. Regulator will thus get detached from the
- valve.
- Place the safety cap on top of the valve. Press the cap firmly down until a
- distinct click is heard. Now the empty cylinder can be removed.





CONNECTING CYLINDER


- To remove the safety cap, PULL the cord, and LIFT the cap off the valve.
- To mount the regulator on the filled cylinder, carry out the following steps :
 - Ensure the switch knob of the regulator is in the 'off' position ('Off' letters shown on top).
 - Grip the regulator and pull the black plastic bush up.
 - Place the regulator vertically on the valve and press it down with a gentle swivel. Release the black plastic bush and press it down. (you may hear a click sound).
 - The pressure regulator is now locked.



TO LIGHT THE BURNER

- Turn the switch knob anti-clockwise till it is in 'O' position. This opens the valve on the LPG cylinder allowing the gas to pass through the regulator to the stove.
- HOLD a lighted matchstick near the burner head.
- Turn the knob of the burner to ON position.

WHEN YOU HAVE FINISHED USING THE BURNER, TURN THE SWITCH KNOB OF THE REGULATOR CLOCKWISE TO THE 'OFF' POSITION.

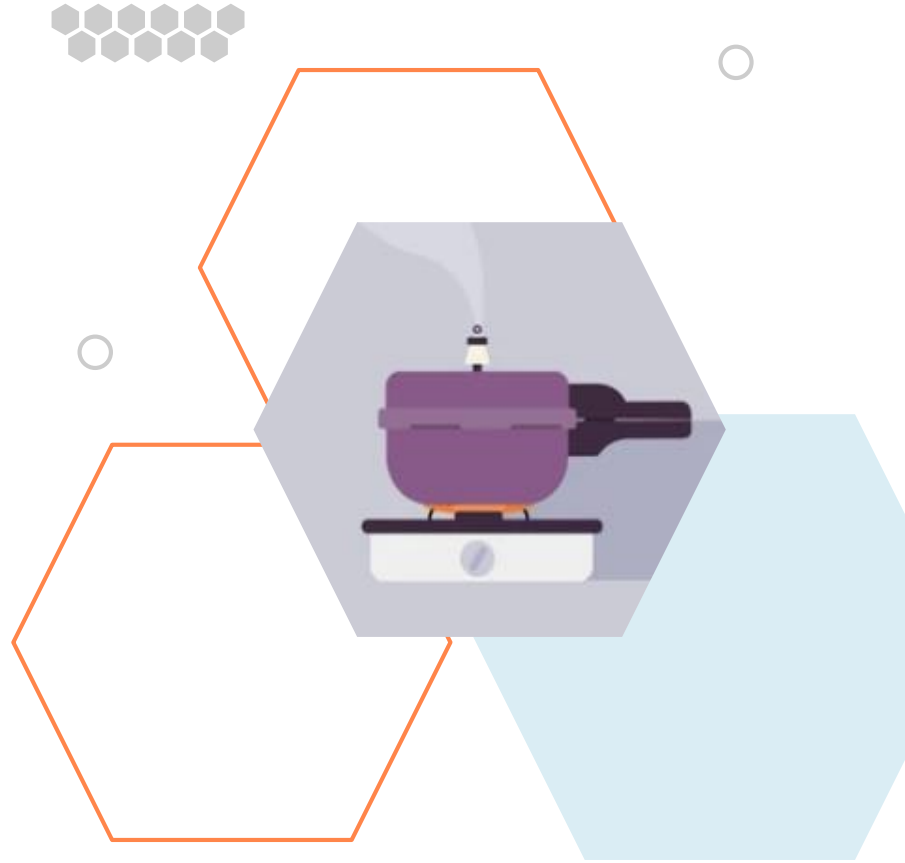



IF YOU SMELL GAS

- Ensure that BURNER KNOBS are in CLOSED position.
- EXTINGUISH all fires and flames.
- Do not light a match.
- Switch OFF the pressure REGULATOR by turning the knob CLOCKWISE TO THE 'OFF' POSITION.
- Open all doors and windows.
- If gas smell persists; call your Gas Distributor or the Emergency Service Cell. Do not operate electrical switches, DETACH the regulator. Fix the Safety cap on the valve.
- Remove the cylinder to a safe and ventilated place. Do not bring any naked flame or fire near the cylinder.





Do you have any questions?

customercare@aegisindia.com |
1800 103 5859 |



For more information visit our website:
<http://www.aegisindia.com/>